

## Product Overview

The NCA9555 is a 24-pin CMOS device that provides 16 bits of General Purpose parallel Input/Output (GPIO) expansion for I2C-bus applications. It provides a simple solution when additional I/O is needed for ACPI power switches, sensors, push buttons, LEDs, fans, etc.

The NCA9555 consists of two 8-bit Configuration (Input or Output selection); Input, Output and Polarity Inversion (active HIGH or active LOW operation) registers. The system master can enable the I/Os as either inputs or outputs by writing to the I/O configuration bits. The data for each Input or Output is kept in the corresponding Input or Output register. The polarity of the read register can be inverted with the Polarity Inversion register. All registers can be read by the system master.

The NCA9555 open-drain interrupt output is activated when any input state differs from its corresponding input port register state and is used to indicate to the system master that an input state has changed. The power-on reset sets the registers to their default values and initializes the device state machine.

Three hardware pins (A0, A1, A2) vary the fixed I2C-bus address and allow up to eight devices to share the same I2C-bus.

## Key Features

- Operating power supply voltage range of 2.3 V to 5.5 V
- 5 V tolerant I/Os
- I2C to Parallel Port Expander
- Polarity Inversion register
- Active LOW interrupt output
- Compatible With Most Microcontrollers
- Address by Three Hardware Address Pins for Use of up to Eight Devices
- Latched Outputs With High-Current Drive Capability for Directly Driving LEDs
- Low standby current
- Noise filter on SCL/SDA inputs
- No glitch on power-up
- Internal power-on reset
- 16 I/O pins which default to 16 inputs

- 0 Hz to 400 kHz clock frequency
- ESD protection exceeds 2000 V HBM, and 1000 V CDM
- Latch-up testing exceeds 100 mA

## Applications

- GPIO expansion for I2C-bus applications
- Servers
- Routers (Telecom Switching Equipment)
- Personal Computers
- Personal Electronics
- Products with GPIO-Limited Processors

## Device Information

Part Number	Package	Body Size
NCA9555	TSSOP24	7.80mm*4.40mm

## Functional Block Diagrams

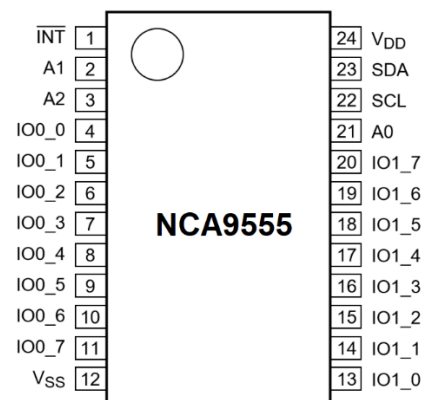


Figure 1. NCA9555 Block Diagram

## INDEX

1. PIN CONFIGURATION AND FUNCTIONS .....	3
2. ABSOLUTE MAXIMUM RATINGS .....	5
3. RECOMMENDED OPERATING CONDITIONS .....	5
4. THERMAL INFORMATION .....	5
5. SPECIFICATIONS .....	6
5.1. ELECTRICAL CHARACTERISTICS .....	6
5.2. DYNAMIC CHARACTERISTICS .....	8
6. DETAILED DESCRIPTION .....	10
6.1. FUNCTIONAL BLOCK DIAGRAM .....	10
6.2. I/O PORT .....	11
6.3. INTERRUPT OUTPUT .....	11
6.4. POWER-ON RESET .....	11
6.5. CHARACTERISTICS OF THE I2C-BUS .....	12
6.5.1. bit transfer .....	12
6.5.2. start and stop conditions .....	12
6.5.3. system configuration .....	12
6.5.4. Acknowledge .....	13
6.6. REGISTER DESCRIPTION .....	13
6.6.1. Device address .....	13
6.6.2. command byte .....	13
6.6.3. Registers 0 and 1: Input port registers .....	14
6.6.4. registers 2 and 3: output port registers .....	14
6.6.5. registers 4 and 5: polarity inversion registers .....	15
6.6.6. Registers 6 and 7: CONFIGURATION registers .....	15
6.7. BUS TRANSACTIONS .....	15
6.7.1. WRITING TO THE PORT REGISTERS .....	15
6.7.2. READING THE PORT REGISTERS .....	16
7. APPLICATION DESIGN-IN INFORMATION .....	18
8. TEST INFORMATION .....	19
9. PACKAGE INFORMATION .....	20
10. TAPE AND REEL INFORMATION .....	22
11. ORDER INFORMATION .....	23
12. DOCUMENTATION SUPPORT .....	23
13. REVISION HISTORY .....	23

## 1. Pin Configuration and Functions

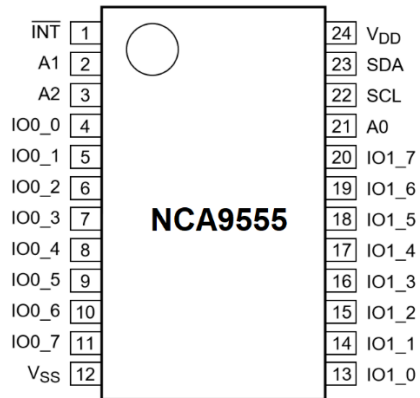


Figure 1-1. NCA9555 Package

Table 1-1. Pin Description

Symbol	Pin	Description
/INT	1	interrupt output (open-drain)
A1	2	address input 1
A2	3	address input 2
IO0_0	4	port 0 input/output
IO0_1	5	
IO0_2	6	
IO0_3	7	
IO0_4	8	
IO0_5	9	
IO0_6	10	
IO0_7	11	
VSS	12	supply ground
IO1_0	13	port 1 input/output
IO1_1	14	
IO1_2	15	
IO1_3	16	
IO1_4	17	
IO1_5	18	
IO1_6	19	
IO1_7	20	
A0	21	address input 0
SCL	22	serial clock line
SDA	23	serial data line
VDD	24	supply voltage

## 2. Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)<sup>[1]</sup>.

Parameters	Symbol	Min	Max	Unit	Conditions
Supply voltage	V <sub>DD</sub>	-0.5	+6.0	V	
Voltage on an input/output pin	V <sub>I/O</sub>	V <sub>SS</sub> -0.5	V <sub>DD</sub> +0.5V <sup>1</sup>	V	
Output current	I <sub>O</sub>	-	±50	mA	On an I/O pin
Input current	I <sub>I</sub>	-	±20	mA	
Supply current	I <sub>DD</sub>	-	160	mA	
Ground supply current	I <sub>SS</sub>	-	200	mA	
Total power dissipation	P <sub>tot</sub>	-	200	mW	
Maximum junction temperature	T <sub>j(max)</sub>	-	125	°C	
Storage temperature	T <sub>stg</sub>	-65	+150	°C	
Ambient temperature	T <sub>amb</sub>	-40	+85	°C	Operating

<sup>[1]</sup> Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to Absolute Maximum Rating condition for extended periods may affect device reliability.

## 3. Recommended Operating Conditions

Parameters	Symbol	Min	Max	Unit
Supply voltage	V <sub>CCA</sub>	2.3	5.5	V
High-level input voltage	V <sub>IH</sub>	0.7*V <sub>CC</sub>	5.5	V
Low-level input voltage	V <sub>IL</sub>	-0.5	0.3*V <sub>CC</sub>	V
High-level output current	I <sub>OH</sub>		-10	mA
Low-level output current(P00-P07,P10-P17)	I <sub>OL</sub>		10	mA
Low-level output current(/INT,SDA)	I <sub>OL</sub>		3.5	mA
Operating free-air temperature	T <sub>A</sub>	-40	85	°C

## 4. Thermal Information

Parameters	Symbol	TSSOP24	Unit
Junction-to-ambient thermal resistance	θ <sub>JA</sub>	108.8	°C/W
Junction-to-case(top) thermal resistance	θ <sub>JC (top)</sub>	54	
Junction-to-board thermal resistance	θ <sub>JB</sub>	62.8	

## 5. SPECIFICATIONS

### 5.1. Electrical characteristics

$V_{DD} = 2.3V$  to  $5.5V$ ;  $T_{amb} = -40^{\circ}C$  to  $+85^{\circ}C$ ; unless otherwise noted.

Parameters	Symbol	Min	Typ	Max	Unit	Conditions
Supplies						
Supply voltage Range	V <sub>DD</sub>	2.3	-	5.5	V	
Power On Reset <sup>[1]</sup>	V <sub>POR</sub>	-	0.94	1.5	V	no load; V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub>
Supply current	I <sub>DD</sub>	-	5.74	90	μA	Operating mode; V <sub>DD</sub> = 5.5 V; no load; f <sub>SCL</sub> = 100 kHz; V <sub>I</sub> = V <sub>DD</sub>
Standby current	I <sub>stb</sub>	-	0.9	1.5	mA	Standby mode; V <sub>DD</sub> = 5.5 V; no load; V <sub>I</sub> = V <sub>SS</sub> ; f <sub>SCL</sub> = 0 kHz; I/O = inputs
		-	0.25	1	μA	Standby mode; V <sub>DD</sub> = 5.5 V; no load; V <sub>I</sub> = V <sub>DD</sub> ; f <sub>SCL</sub> = 0 kHz; I/O = inputs
Input SCL; Input and Output SDA						
LOW-level input voltage	V <sub>IL</sub>	-0.5	-	0.3*V <sub>D</sub> <sub>D</sub>	V	
HIGH-level input voltage	V <sub>IH</sub>	0.7*V <sub>D</sub> <sub>D</sub>	-	5.5	V	
LOW-level output current	I <sub>OL</sub>	3	-	-	mA	V <sub>DD</sub> = 2.3 V to 5.5 V; V <sub>OL</sub> = 0.4 V
Input leakage current	I <sub>L</sub>	-1	-	+1	μA	V <sub>DD</sub> = 2.3 V to 5.5 V; V <sub>I</sub> = V <sub>DD</sub> or V <sub>SS</sub>
Input capacitance	C <sub>i</sub>	-	6	10	pF	V <sub>I</sub> = V <sub>SS</sub>
I/Os						
LOW-level input voltage	V <sub>IL</sub>	-0.5	-	0.3*V <sub>D</sub> <sub>D</sub>	V	
HIGH-level input voltage	V <sub>IH</sub>	0.7*V <sub>D</sub> <sub>D</sub>	-	5.5	V	
LOW-level output current	I <sub>OL</sub>	8	13 to 23	-	mA	V <sub>DD</sub> = 2.3 V to 5.5 V; V <sub>OL</sub> = 0.5 V <sup>[2]</sup>
		10	16 to 32	-	mA	V <sub>DD</sub> = 2.3 V to 5.5 V; V <sub>OL</sub> = 0.7 V <sup>[2]</sup>
HIGH-level output voltage	V <sub>OH</sub>	1.8	-	-	V	IOH = -8 mA; V <sub>DD</sub> = 2.3 V <sup>[3]</sup>
		1.7	-	-	V	IOH = -10 mA; V <sub>DD</sub> = 2.3 V <sup>[3]</sup>
		2.6	-	-	V	IOH = -8 mA; V <sub>DD</sub> = 3.0 V <sup>[3]</sup>
		2.5	-	-	V	IOH = -10 mA; V <sub>DD</sub> = 3.0 V <sup>[3]</sup>
		4.3	-	-	V	IOH = -8 mA; V <sub>DD</sub> = 4.75V <sup>[3]</sup>

		4.0	-	-	V	$I_{OH} = -10 \text{ mA}$ ; $V_{DD} = 4.75\text{V}^{[3]}$
HIGH-level input leakage current	$I_{LIH}$	-	-	1	$\mu\text{A}$	$V_{DD} = 5.5 \text{ V}$ ; $V_I = V_{DD}$
LOW-level input leakage current	$I_{LIL}$	-	-	-100	$\mu\text{A}$	$V_{DD} = 5.5 \text{ V}$ ; $V_I = V_{SS}$
Input capacitance	$C_i$	-	3.7	5	pF	
Output capacitance	$C_o$	-	3.7	5	pF	
<b>Interrupt <math>\overline{INT}</math></b>						
LOW-level output current	$I_{OL}$	3	-	-	mA	$V_{DD} = 2.3 \text{ V to } 5.5 \text{ V}$ ; $V_{OL}=0.4\text{V}$
<b>Select Inputs A0, A1, A2</b>						
LOW-level input voltage	$V_{IL}$	-0.5	-	$0.3 \cdot V_{DD}$	V	
HIGH-level input voltage	$V_{IH}$	$0.7 \cdot V_{DD}$	-	5.5	V	
Input leakage current	$I_{LI}$	-1	-	+1	$\mu\text{A}$	$V_{DD} = 2.3 \text{ V to } 5.5 \text{ V}$ ; $V_I = V_{DD} \text{ or } V_{SS}$

1.  $V_{DD}$  must be lowered to 0.2V for at least 50 $\mu\text{s}$  in order to reset part.

2. Each I/O must be externally limited to a maximum of 25 mA and each octal (IO0\_0 to IO0\_7 and IO1\_0 to IO1\_7) must be limited to a maximum current of 100 mA for a device total of 200 mA.

3. The total current sourced by all I/Os must be limited to 160 mA.

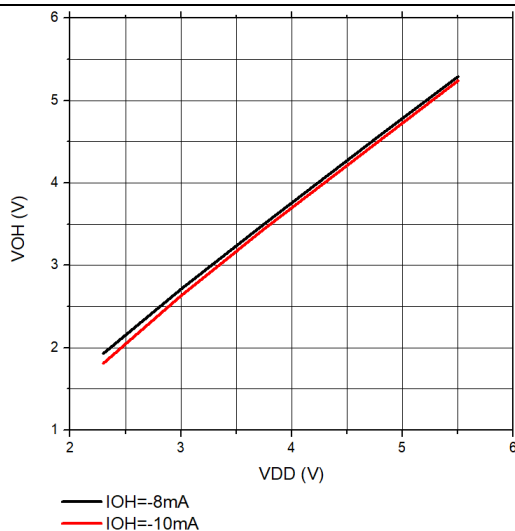


Figure 5-1.  $V_{OH}$  versus Supply Voltage

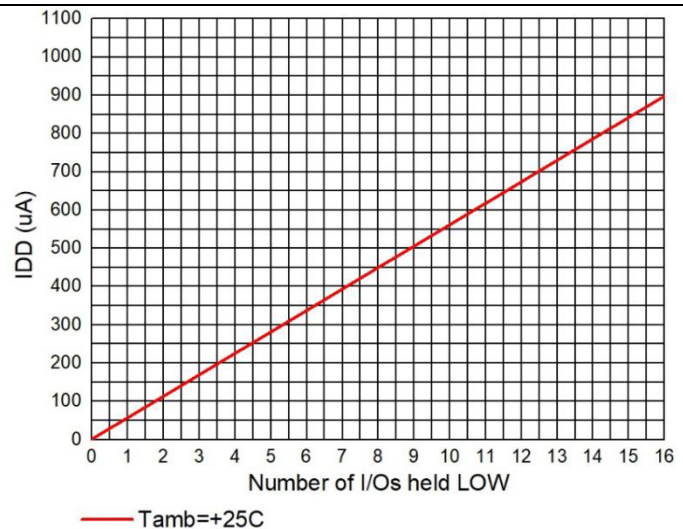


Figure 5-2.  $I_{DD}$  versus number of I/Os held LOW

## 5.2.Dynamic Characteristics

$V_{DD} = 2.3V$  to  $5.5V$ ;  $T_{amb} = -40^{\circ}C$  to  $+85^{\circ}C$ ; unless otherwise noted.

Parameters	Symbol	Standard-mode I2C-bus		Fast-mode I2C-bus		Unit
		Min	Max	Min	Max	
SCL clock frequency	$f_{SCL}$	0	100	0	400	kHz
bus free time between a STOP and START condition	$t_{BUF}$	4.7	-	1.3	-	$\mu s$
hold time (repeated) START condition	$t_{HD,STA}$	4.0	-	0.6	-	$\mu s$
set-up time for a repeated START condition	$t_{SU,STA}$	4.7	-	0.6	-	$\mu s$
set-up time for STOP condition	$t_{SU,STO}$	4.0	-	0.6	-	$\mu s$
data valid acknowledge time	$t_{VD,ACK}^{[1]}$	0.3	3.45	0.1	0.9	$\mu s$
data hold time	$t_{HD,DAT}$	0	-	0	-	ns
data valid time	$t_{VD,DAT}^{[2]}$	300	-	50	-	ns
data set-up time	$t_{SU,DAT}$	250	-	100	-	ns
LOW period of the SCL clock	$t_{LOW}$	4.7	-	1.3	-	$\mu s$
HIGH period of the SCL clock	$t_{HIGH}$	4.0	-	0.6	-	$\mu s$
fall time of both SDA and SCL signals	$t_f$	-	300	$20 + 0.1C_b^{[3]}$	300	ns
rise time of both SDA and SCL signals	$t_r$	-	1000	$20 + 0.1C_b^{[3]}$	300	ns
pulse width of spikes that must be suppressed by the input filter	$t_{SP}$	-	50	-	50	ns
data output valid time	$t_{V(Q)}$	-	200	-	200	ns
data input set-up time	$t_{SU(D)}$	150	-	150	-	ns
data input hold time	$t_{H(D)}$	1	-	1	-	$\mu s$
valid time on pin /INT	$t_{V(INT\_N)}^{[4]}$	-	4	-	4	$\mu s$
reset time on pin /INT	$t_{rst(INT\_N)}^{[5]}$	-	4	-	4	$\mu s$

1.  $t_{VD,ACK}$  = time for acknowledgement signal from SCL LOW to SDA (out) LOW.

2.  $t_{VD,DAT}$  = minimum time for SDA data out to be valid following SCL LOW.

3.  $C_b$  = total capacitance of one bus line in pF.

4.  $t_{V(INT\_N)}$  is measured from 50% IO input to  $0.3 \cdot V_{DD}$  on /INT

5.  $t_{rst(INT\_N)}$  is measured from  $0.3 \cdot V_{DD}$  on SCL to  $0.7 \cdot V_{DD}$  on /INT.



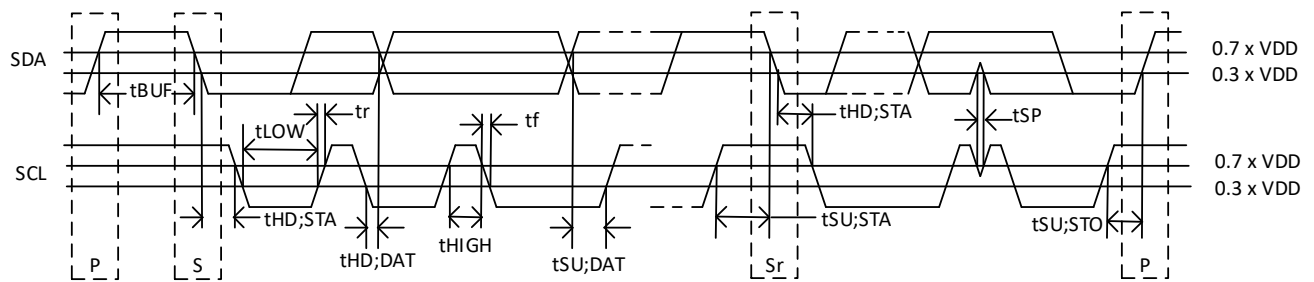


Figure 5-3. Definition of timing on I2C-bus

## 6. Detailed Description

### 6.1. Functional Block Diagram

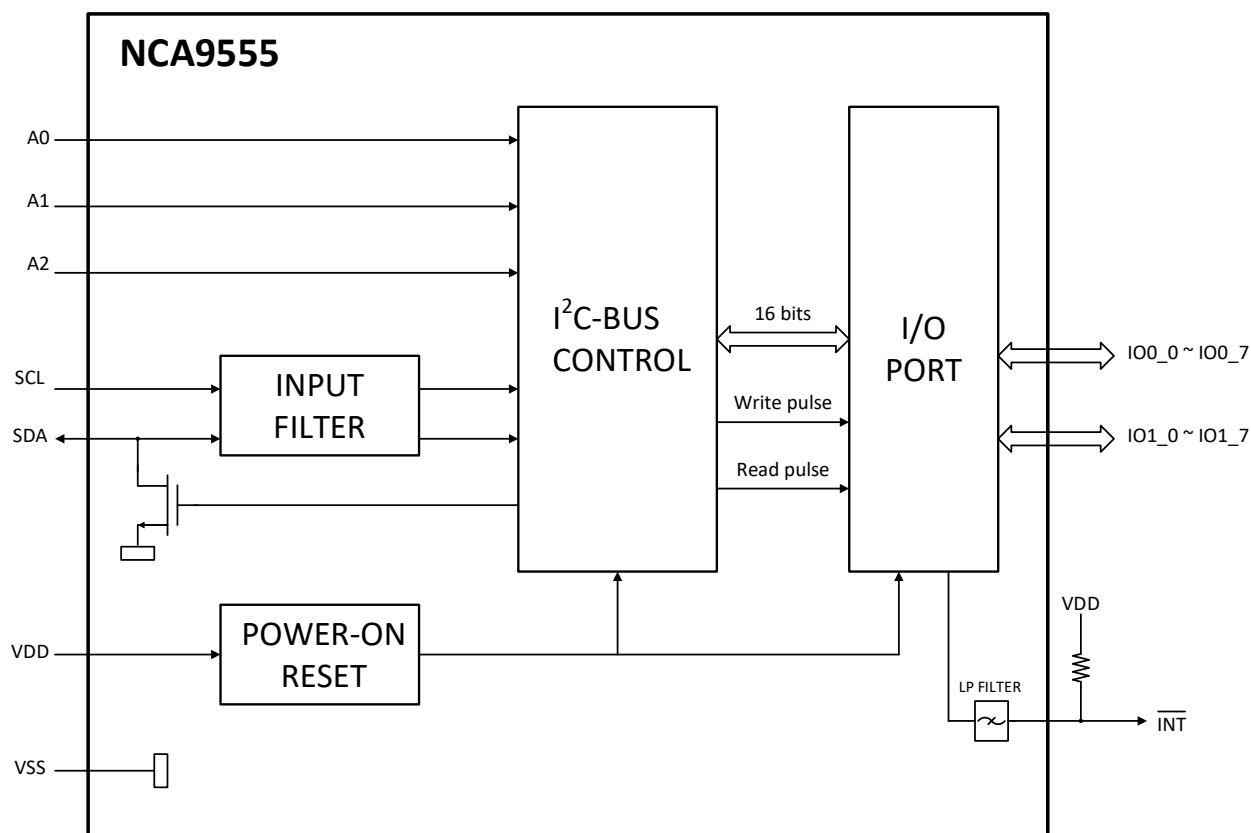


Figure 6-1. Block Diagram of NCA9555

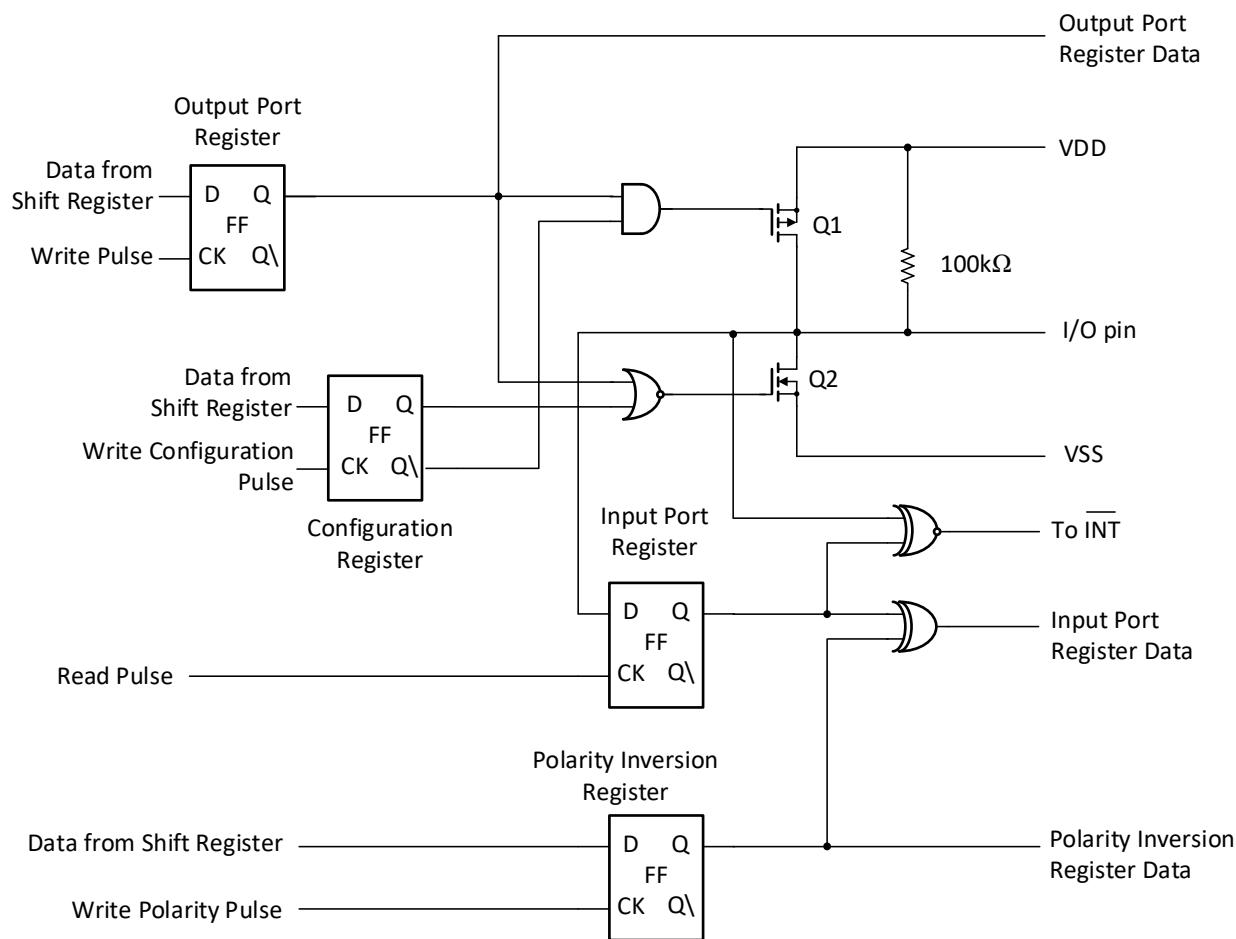


Figure 6-2. Simplified schematic of I/Os

## 6.2 I/O PORT

When an I/O is configured as an input, FETs Q1 and Q2 are off, creating a high-impedance input with a weak pull-up to VDD. The input voltage may be raised above VDD to a maximum of 5.5 V.

If the I/O is configured as an output, then either Q1 or Q2 is on, depending on the state of the Output Port register. Care should be exercised if an external voltage is applied to an I/O configured as an output because of the low-impedance path that exists between the pin and either VDD or VSS.

## 6.3 interrupt output

The open-drain interrupt output is activated when one of the port pins changes state and the pin is configured as an input. The interrupt is deactivated when the input returns to its previous state or the Input Port register is read. A pin configured as an output cannot cause an interrupt. Since each 8-bit port is read independently, the interrupt caused by Port 0 will not be cleared by a read of Port 1 or the other way around.

INT $\bar{L}$  has an open-drain structure and requires a pull-up resistor to VDD.

Changing an I/O from an output to an input may cause a false interrupt to occur if the state of the pin does not match the contents of the Input Port register.

## 6.4 POWER-ON RESET

When power is applied to VDD, an internal power-on reset holds the NCA9555 in a reset condition until VDD has reached

$V_{POR}$ . At that point, the reset condition is released and the NCA9555 registers and I2C state machine will initialize to their default states. The power-on reset typically completes the reset and enables the part by the time the power supply is above  $V_{POR}$ . However, when it is required to reset the part by lowering the power supply, it is necessary to lower it below 0.2 V for at least 50 $\mu$ s.

## 6.5 characteristics of the I2C-BUS

The I<sup>2</sup>C-bus is for 2-way, 2-line communication between different ICs or modules. The two lines are a serial data line (SDA) and a serial clock line (SCL). Both lines must be connected to a positive supply via a pull-up resistor when connected to the output stages of a device. Data transfer may be initiated only when the bus is not busy.

### 6.5.1.bit transfer

One data bit is transferred during each clock pulse. The data on the SDA line must remain stable during the HIGH period of the clock pulse as changes in the data line at this time will be interpreted as control signals.

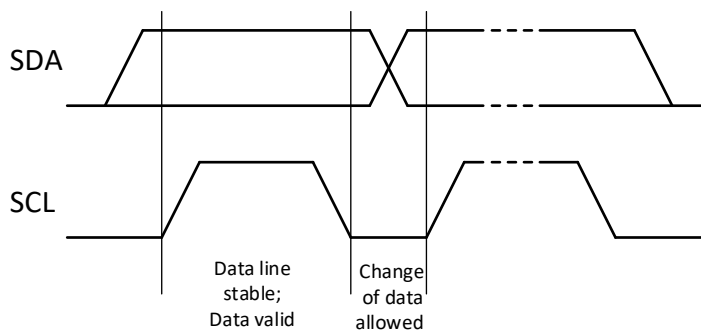


Figure 6-3. Bit transfer

### 6.5.2. start and stop conditions

Both data and clock lines remain HIGH when the bus is not busy. A HIGH-to-LOW transition of the data line while the clock is HIGH is defined as the START condition (S). A LOW-to-HIGH transition of the data line while the clock is HIGH is defined as the STOP condition (P).

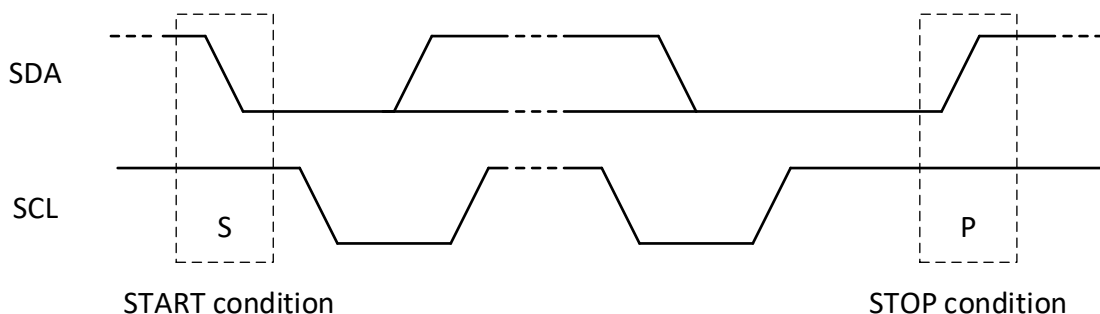


Figure 6-4. Definition of START and STOP conditions

### 6.5.3. system configuration

A device generating a message is a 'transmitter'; a device receiving is the 'receiver'. The device that controls the message is the 'master' and the devices which are controlled by the master are the 'slaves'.

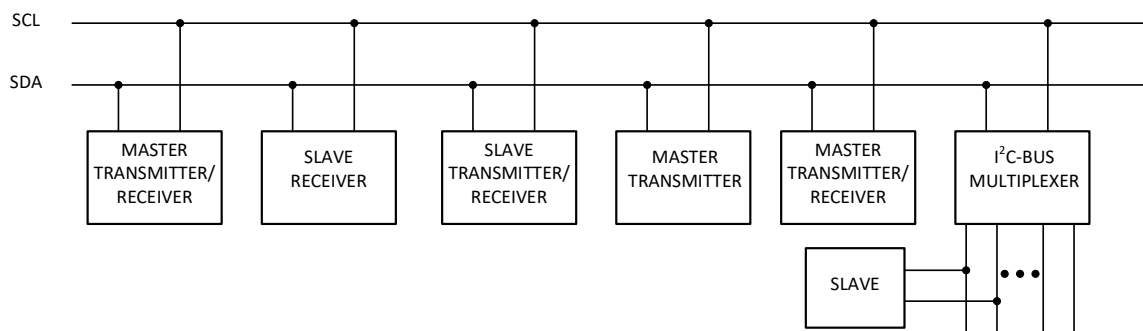



Figure 6-5. System configuration

#### 6.5.4. Acknowledge

The number of data bytes transferred between the START and the STOP conditions from transmitter to receiver is not limited. Each byte of eight bits is followed by one acknowledge bit. The acknowledge bit is a HIGH level put on the bus by the transmitter, whereas the master generates an extra acknowledge related clock pulse.

A slave receiver which is addressed must generate an acknowledge after the reception of each byte. Also a master must generate an acknowledge after the reception of each byte that has been clocked out of the slave transmitter. The device that acknowledges has to pull down the SDA line during the acknowledge clock pulse, so that the SDA line is stable LOW during the HIGH period of the acknowledge related clock pulse; set-up time and hold time must be taken into account.

A master receiver must signal an end of data to the transmitter by not generating an acknowledge on the last byte that has been clocked out of the slave. In this event, the transmitter must leave the data line HIGH to enable the master to generate a STOP condition.

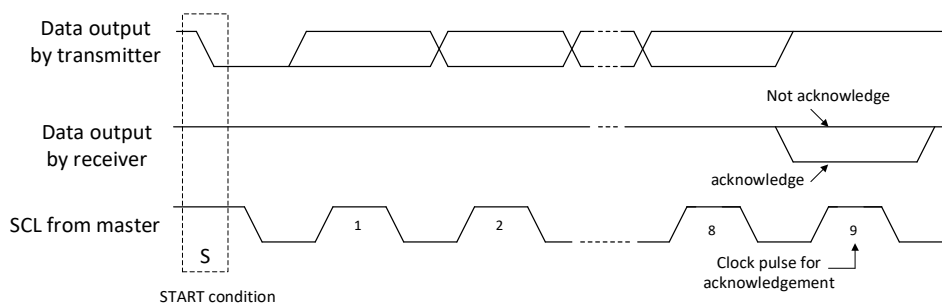Figure 6-6. Acknowledgement on I<sup>2</sup>C-bus

## 6.6 Register Description

The register map of the NCA9555 includes input port registers, output port registers, polarity inversion port registers and configuration registers.

### 6.6.1. Device address

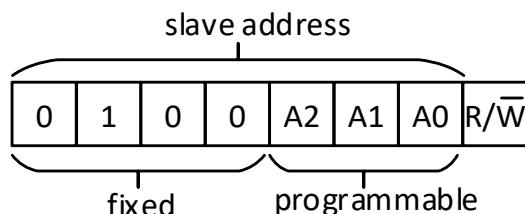


Figure 6-7. NCA9555 device address

### 6.6.2. command byte

The command byte is the first byte to follow the address byte during a write transmission. It is used as a pointer to determine which of the following registers will be written or read.

Table 6-1. Command byte

Command	Register
0	Input port 0
1	Input port 1
2	Output port 0
3	Output port 1
4	Polarity Inversion port 0
5	Polarity Inversion port 1
6	Configuration port 0
7	Configuration port 1

### 6.6.3. Registers 0 and 1: Input port registers

This register is an input-only port. It reflects the incoming logic levels of the pins, regardless of whether the pin is defined as an input or an output by Register 3. Writes to this register have no effect.

The default value 'X' is determined by the externally applied logic level.

Table 6-2. Input Port 0 Register

Bit	7	6	5	4	3	2	1	0
Symbol	I0.7	I0.6	I0.5	I0.4	I0.3	I0.2	I0.1	I0.0
Default	X	X	X	X	X	X	X	X

Table 6-3. Input Port 1 Register

Bit	7	6	5	4	3	2	1	0
Symbol	I1.7	I1.6	I1.5	I1.4	I1.3	I1.2	I1.1	I1.0
Default	X	X	X	X	X	X	X	X

### 6.6.4. registers 2 and 3: output port registers

This register is an output-only port. It reflects the outgoing logic levels of the pins defined as outputs by Registers 6 and 7. Bit values in this register have no effect on pins defined as inputs. In turn, reads from this register reflect the value that is in the flip-flop controlling the output selection, not the actual pin value.

Table 6-4. Output Port 0 Register

Bit	7	6	5	4	3	2	1	0
Symbol	O0.7	O0.6	O0.5	O0.4	O0.3	O0.2	O0.1	O0.0
Default	1	1	1	1	1	1	1	1

Table 6-5. Output Port 1 Register

Bit	7	6	5	4	3	2	1	0
Symbol	O1.7	O1.6	O1.5	O1.4	O1.3	O1.2	O1.1	O1.0

Default	1	1	1	1	1	1	1	1
---------	---	---	---	---	---	---	---	---

### 6.6.5. registers 4 and 5: polarity inversion registers

This register allows the user to invert the polarity of the Input port register data. If a bit in this register is set (written with '1'), the Input port data polarity is inverted. If a bit in this register is cleared (written with a '0'), the Input port data polarity is retained.

Table 6-6. Polarity Inversion Port 0 Register

Bit	7	6	5	4	3	2	1	0
Symbol	N0.7	N0.6	N0.5	N0.4	N0.3	N0.2	N0.1	N0.0
Default	0	0	0	0	0	0	0	0

Table 6-7. Polarity Inversion Port 1 Register

Bit	7	6	5	4	3	2	1	0
Symbol	N1.7	N1.6	N1.5	N1.4	N1.3	N1.2	N1.1	N1.0
Default	0	0	0	0	0	0	0	0

### 6.6.6. Registers 6 and 7: CONFIGURATION registers

This register configures the directions of the I/O pins. If a bit in this register is set (written with '1'), the corresponding port pin is enabled as an input with high-impedance output driver. If a bit in this register is cleared (written with '0'), the corresponding port pin is enabled as an output. Note that there is a high value resistor tied to VDD at each pin. At reset, the device's ports are inputs with a pull-up to VDD.

Table 6-8. Configuration Port 0 Register

Bit	7	6	5	4	3	2	1	0
Symbol	C0.7	C0.6	C0.5	C0.4	C0.3	C0.2	C0.1	C0.0
Default	1	1	1	1	1	1	1	1

Table 6-9. Configuration Port 1 Register

Bit	7	6	5	4	3	2	1	0
Symbol	C1.7	C1.6	C1.5	C1.4	C1.3	C1.2	C1.1	C1.0
Default	1	1	1	1	1	1	1	1

## 6.7 BUS TRANSACTIONS

### 6.7.1. WRITING TO THE PORT REGISTERS

Data is transmitted to the NCA9555 by sending the device address and setting the least significant bit to a logic 0. The command byte is sent after the address and determines which register will receive the data following the command byte. The eight registers within the NCA9555 are configured to operate as four register pairs. The four pairs are Input Ports, Output Ports, Polarity Inversion Ports, and Configuration Ports. After sending data to one register, the next data byte will be sent to the other register in the pair. For example, if the first byte is sent to Output Port 1 (register 3), then the next byte will be stored in Output Port 0 (register 2). There is no limitation on the number of data bytes sent in one write transmission. In this way, each 8-bit register may be updated independently of the other registers.

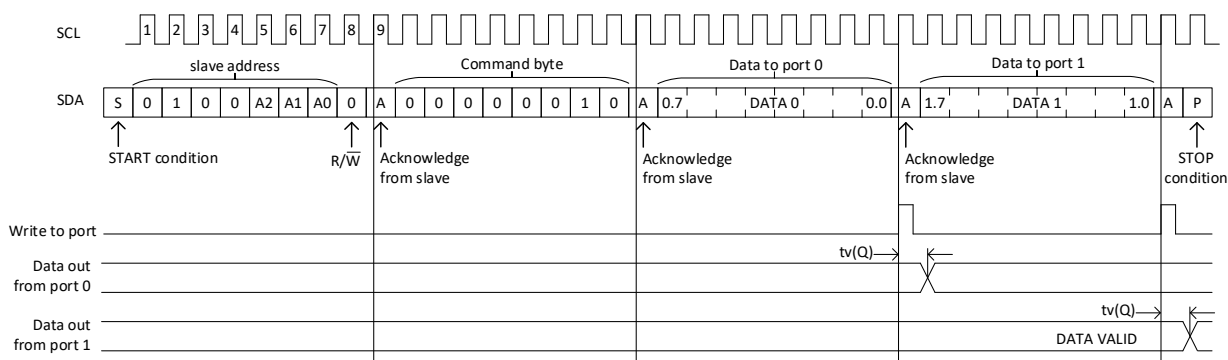


Figure 6-8. Write to output port registers


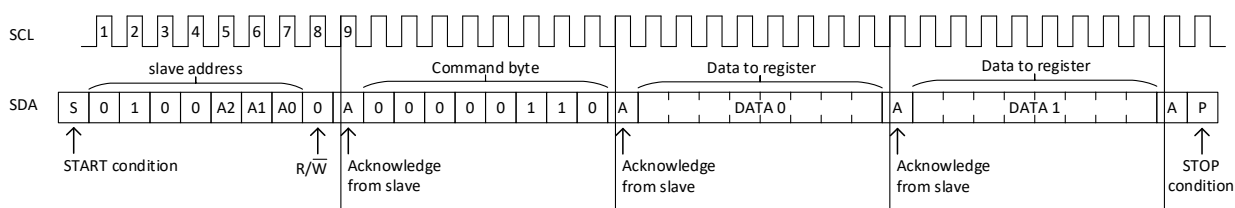


Figure 6-9. Write to configuration registers

### 6.7.2.READING THE PORT REGISTERS


In order to read data from the NCA9555, the bus master must first send the NCA9555 address with the least significant bit set to a logic 0. The command byte is sent after the address and determines which register will be accessed. After a restart, the device address is sent again, but this time the least significant bit is set to a logic 1. Data from the register defined by the command byte will then be sent by the NCA9555. Data is clocked into the register on the rising edge of the acknowledge clock pulse. After the first byte is read, additional bytes may be read but the data will now reflect the information in the other register in the pair. For example, if Input Port 1 is read, then the next byte read would be Input Port 0. There is no limitation on the number of data bytes received in one read transmission, but the final byte received, the bus master must not acknowledge the data.

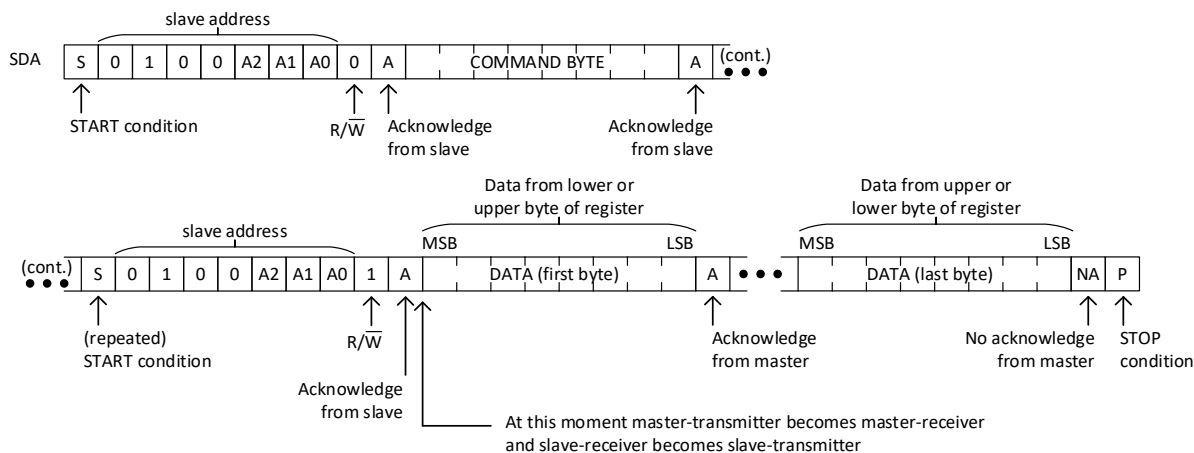

**Remark:** Transfer of data can be stopped at any moment by a STOP condition.


Figure 6-10. Read from registers



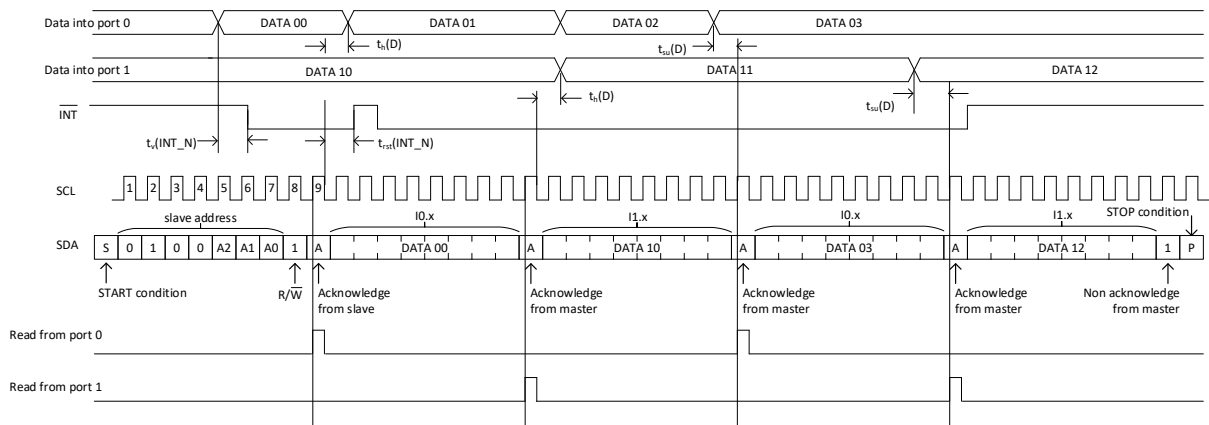

**Remark:** Transfer of data can be stopped at any moment by a STOP condition. When this occurs, data present at the latest acknowledge phase is valid (output mode). It is assumed that the command byte has previously been set to '00' (read Input Port register).

Figure 6-11. Read input port registers, scenario 1

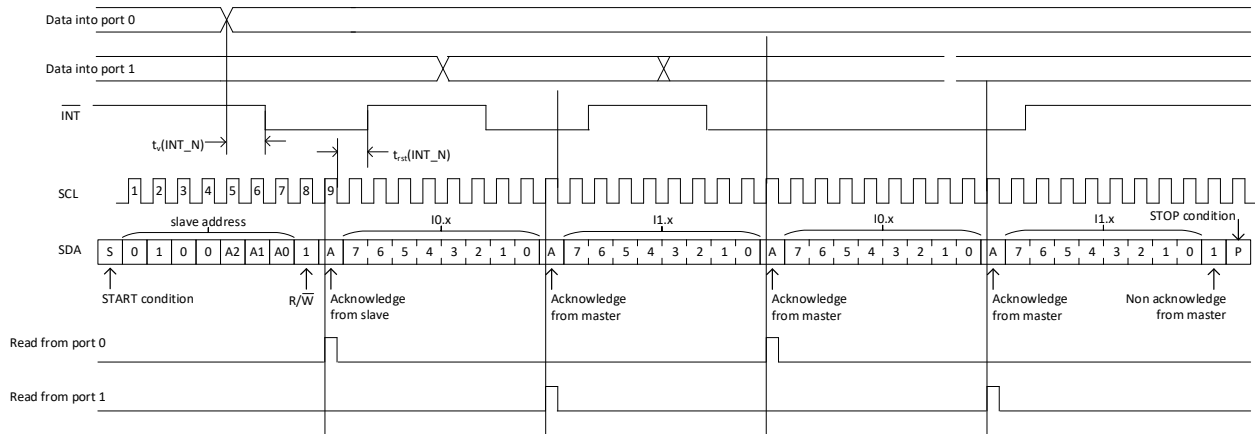

**Remark:** Transfer of data can be stopped at any moment by a STOP condition. When this occurs, data present at the latest acknowledge phase is valid (output mode). It is assumed that the command byte has previously been set to '00' (read Input Port register).

Figure 6-12. Read input port registers, scenario 2

## 7. APPLICATION DESIGN-IN INFORMATION

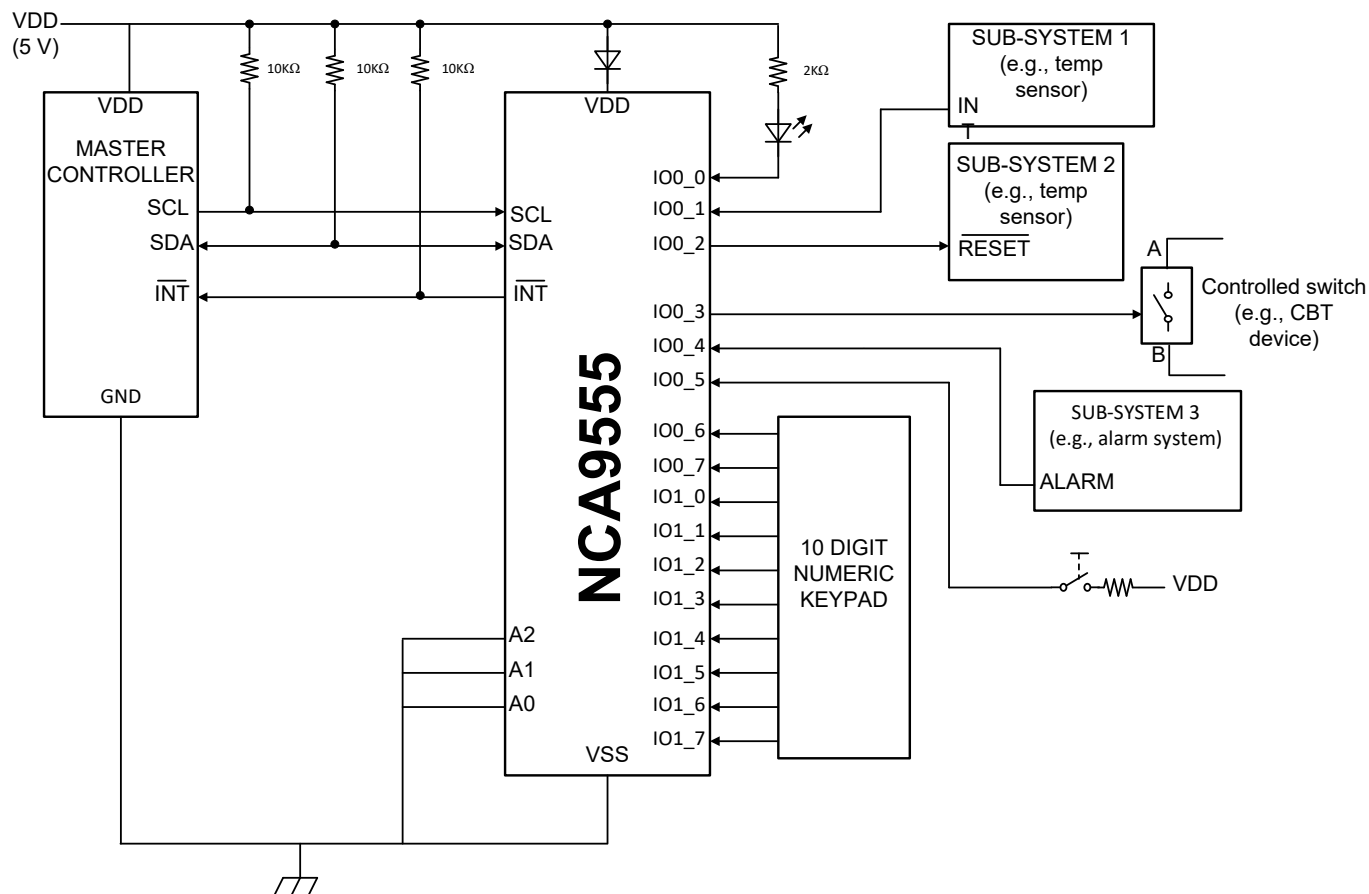


Figure 7-1. Typical application

When the IO level of the NCA9555 is higher than the power supply voltage, the diode inside the chip to prevent backflow will be turned on. In the case of power down and data input, the IO signal will be fed back to the VDD module (e.g. master controller), which will cause the data to be pulled low. In order to realize IO still has high resistance characteristics when power down, it is recommended to connect a forward schottky diode to the power supply pin of NCA9555.


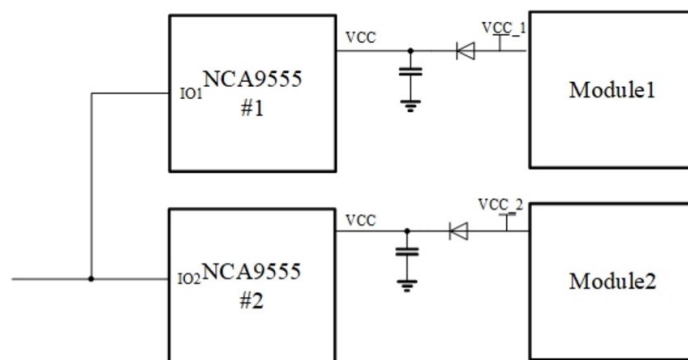


Figure 7-2. Typical application

## 8. Test information

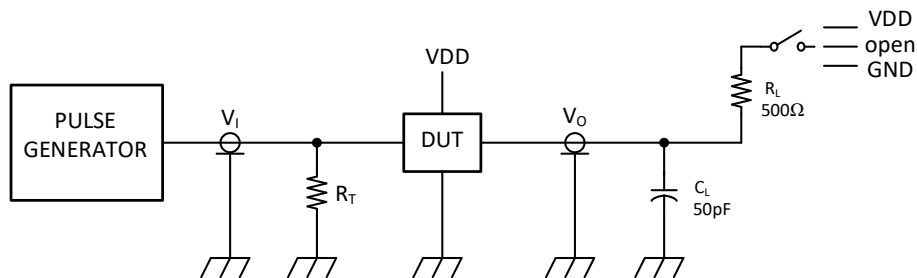

$R_L$  = load resistor.

$C_L$  = load capacitance includes jig and probe capacitance.

$R_T$  = termination resistance should be equal to the output impedance of  $Z_o$  of the pulse generators.

Figure 8-1. Test circuitry for switching times

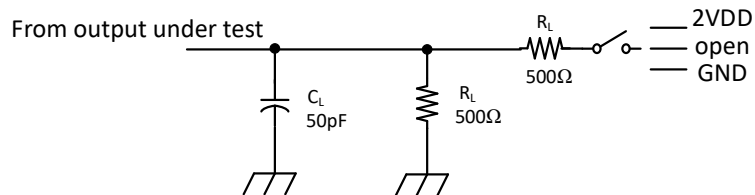


Figure 8-2. Load circuit

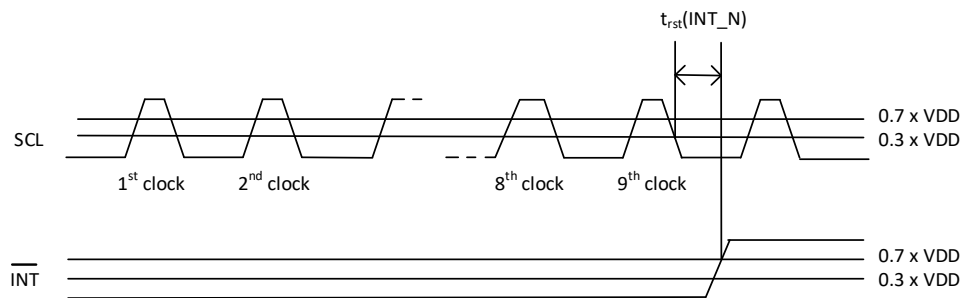


Figure 8-3. Parameter Measurement Waveform:  $t_{rst}(INT\_N)$

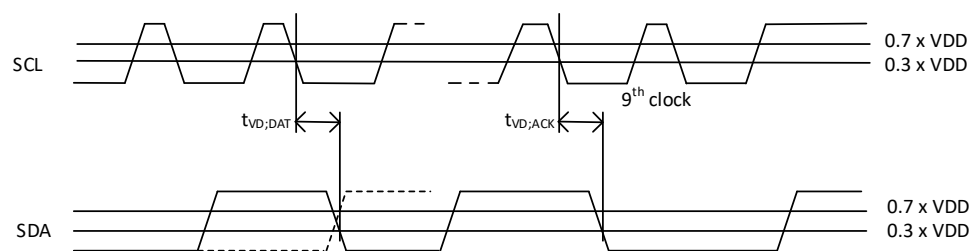


Figure 8-4. Parameter Measurement Waveform:  $t_{VD;DAT}$  &  $t_{VD;ACK}$

9. Package information

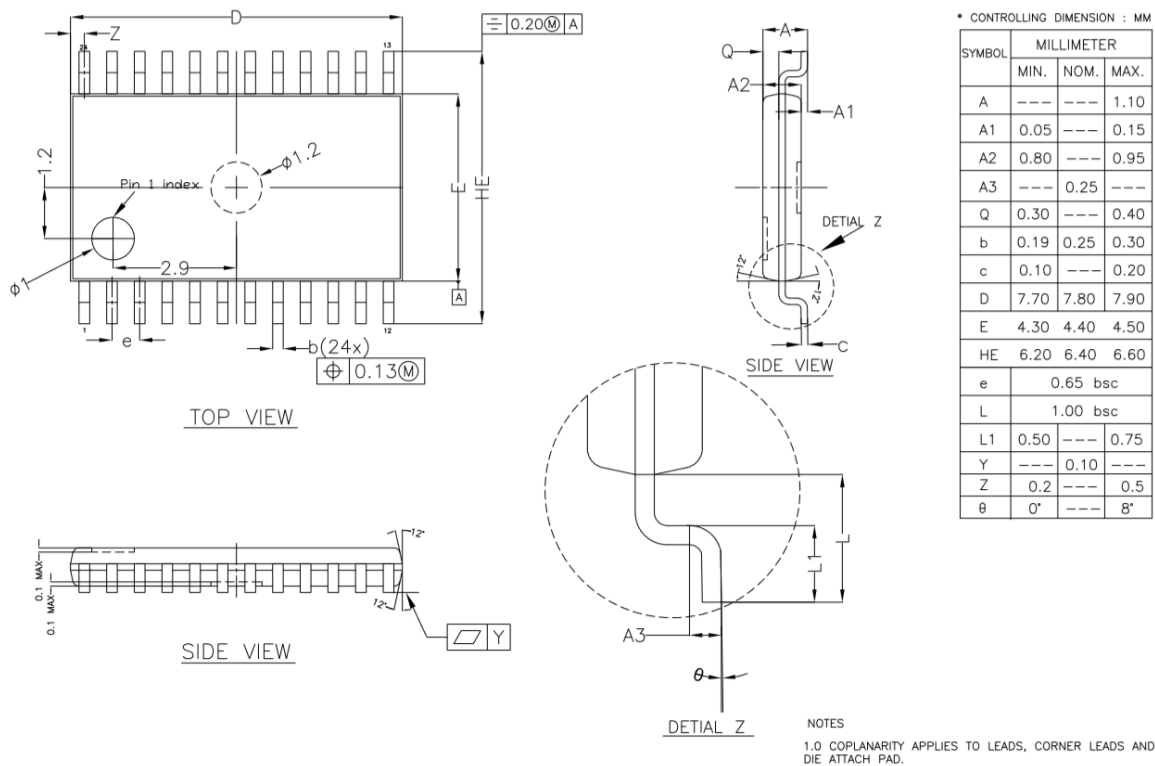


Figure 9-1. Package outline for TSSOP24



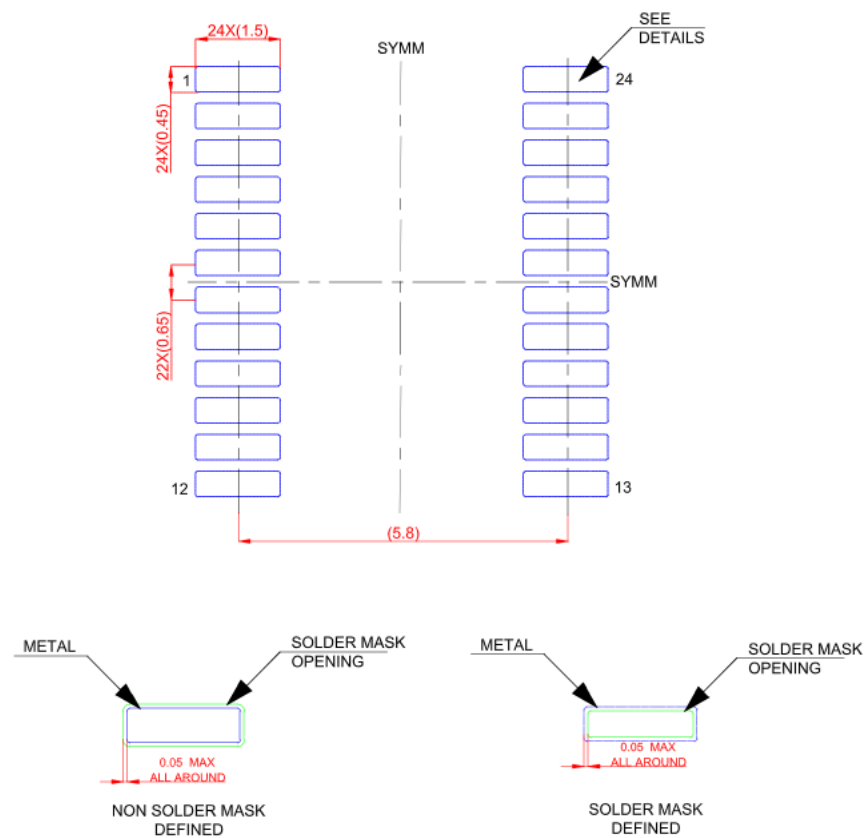



Figure 9-2. TSSOP24 Package Board Layout Example (unit: mm)

10. TAPE AND REEL INFORMATION

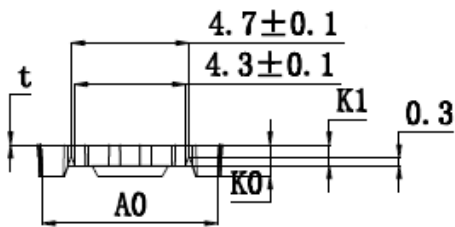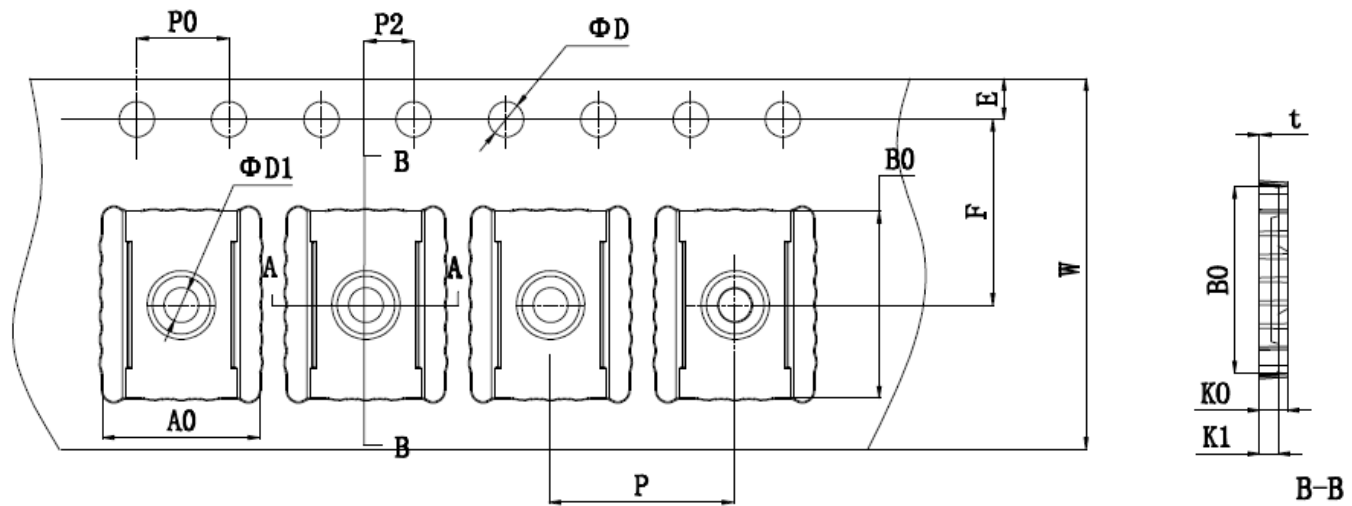

E	1.75±0.10	W	16.00±0.30
F	7.5±0.10	P	8.00±0.10
P2	2.00±0.10	A0	6.80±0.10
D	1.55±0.10	B0	8.04±0.10
D1	1.55±0.10	K0	1.25±0.10
P0	4.00±0.10	K1	1.1±0.10
10P0	40.00±0.20	t	0.30±0.05
		θ	5° TYP

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED

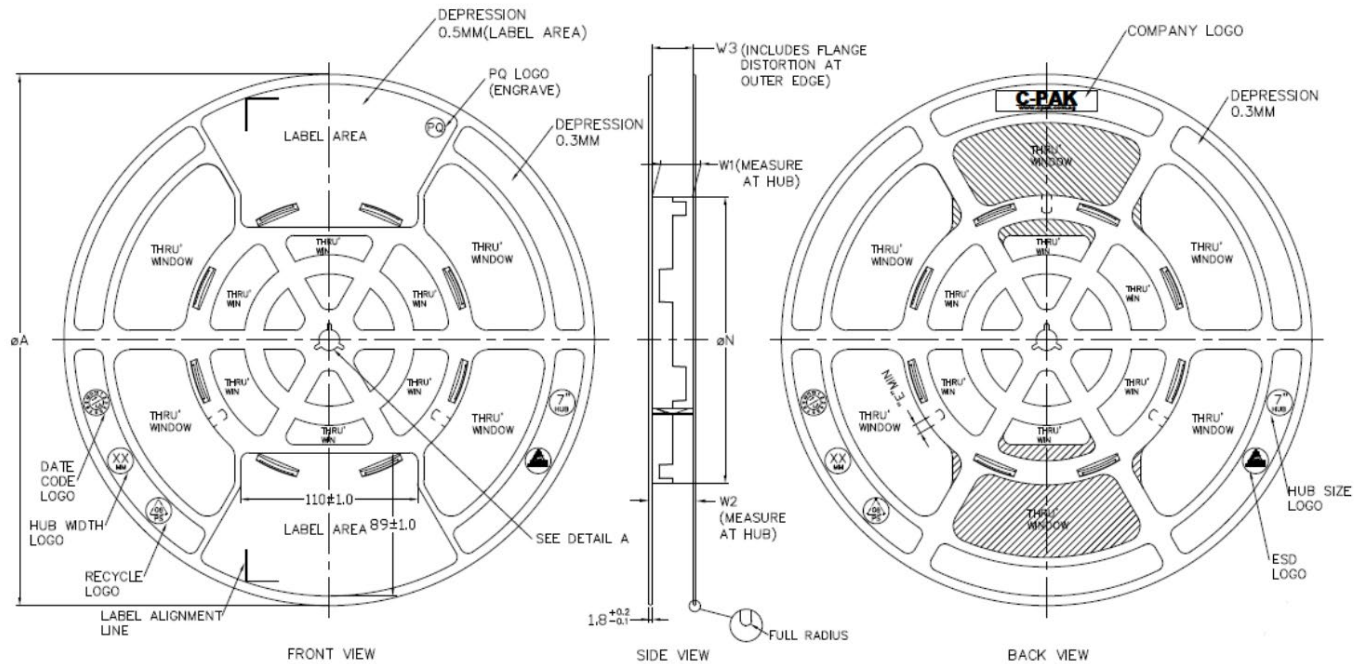

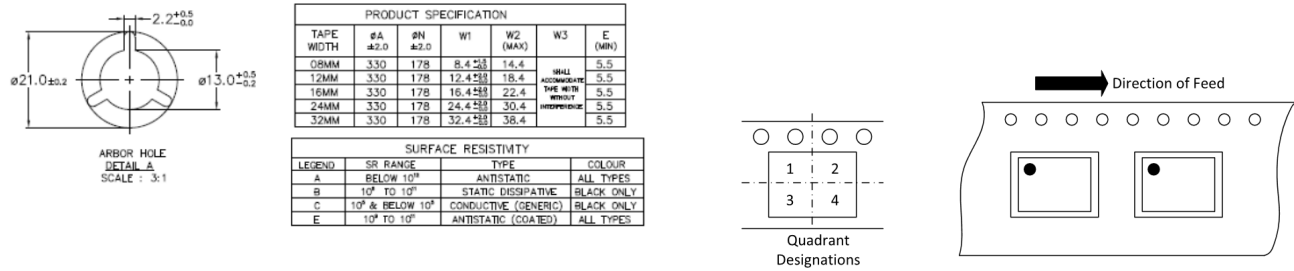


Figure 10-1. tape and reel information for TSSOP24

## 11. Order information

Part No.	Package Type	Pins	MSL Level	Package Qty	Temperature
NCA9555	TSSOP	24	Level 1	2500	-40 to 85°C

## 12. Documentation Support

Part Number	Product Folder	Datasheet	Technical Documents
NCA9555	<a href="#">Click here</a>	<a href="#">Click here</a>	<a href="#">Click here</a>

## 13. Revision History

Revision	Description	Date
1.0	Initial version	2019/2/27
1.1	Added thermal information& order information	2020/2/10
1.2	Changed 3.0 supply current,VPOR and IOL	2020/5/31
1.3	Added application design-in information	2020/10/30
1.4	Added tape pin 1 information and added Package Board Layout Example	2022/4/24
1.5	New datasheet template	2024/9/30

## IMPORTANT NOTICE

The information given in this document (the “Document”) shall in no event be regarded as any warranty or authorization of, express or implied, including but not limited to accuracy, completeness, merchantability, fitness for a particular purpose or infringement of any third party’s intellectual property rights.

Users of this Document shall be solely responsible for the use of NOVOSENSE’s products and applications, and for the safety thereof. Users shall comply with all laws, regulations and requirements related to NOVOSENSE’s products and applications, although information or support related to any application may still be provided by NOVOSENSE.

This Document is provided on an “AS-IS” basis and is intended only for skilled developers designing with NOVOSENSE’ products. NOVOSENSE reserves the rights to make corrections, modifications, enhancements, improvements or other changes to the products and services provided without notice. NOVOSENSE authorizes users to use this Document exclusively for the development of relevant applications or systems designed to integrate NOVOSENSE’s products. No license to any intellectual property rights of NOVOSENSE is granted by implication or otherwise. Using this Document for any other purpose, or any unauthorized reproduction or display of this Document is strictly prohibited. In no event shall NOVOSENSE be liable for any claims, damages, costs, losses or liabilities arising out of or in connection with this Document or the use of this Document.

For further information on applications, products and technologies, please contact NOVOSENSE ([www.novosns.com](http://www.novosns.com)).

**Suzhou NOVOSENSE Microelectronics Co., Ltd**